

# CARGO 140



ATP



## Isothermal container with front opening for the transport of chilled and frozen products at controlled temperature

- Excellent load capacity, indicated for transporting **large quantities**.
- Capacity: 140 litres.
- The insulation provided by the walls of the container (especially thick in this model) ensures proper temperature retention, limiting the risk of bacterial proliferation whilst preserving food quality and organoleptic characteristics.
- **Stackable** and easily movable thanks to the transport trolley in galvanised steel
- It assures proper temperature retention, limiting the risk of bacterial proliferation whilst preserving food quality and organoleptic characteristics.
- The isothermal characteristics comply with current regulations (ATP, EC Reg. 852/2004 –HACCP-) and with applicable technical standards (Accord AFNOR AC D40-007).
- Produced with rotational moulding technology: the container and the door have a monolithic structure (no sharp corners, junctions and welds).
- Designed to be long lasting: performance remains basically unaltered when reused.
- **Fully recyclable** at the end of the operating life.

### MANUFACTURING MATERIALS

<b>Polyethylene</b>	inner and outer walls of the container and of the door; food contact safe	<b>Polyurethane</b>	insulating material between the walls of the container and of the door; free of CFC and HCFC
<b>Silicone rubber</b>	gasket	<b>Fiberglass reinforced polyamide</b>	latches
<b>Stainless steel</b>	carry handles	<b>Aluminium</b>	hinge

## CHARACTERISTICS

	<p>Available in version with runner for eutectic plate.</p>		<p>Eutectic plates:</p> <ul style="list-style-type: none"> <li>• hot (red)</li> <li>• chilled (pink)</li> <li>• superchilled (sand)</li> <li>• frozen (blue)</li> <li>• extra frozen (green)</li> </ul> <p>to increase temperature retention performance over time (on request).</p>
	<p>Trolley in galvanised steel</p> <ul style="list-style-type: none"> <li>• capacity 200 Kg;</li> <li>• 4 rubber coated, anti-tracking castors with PP core;</li> <li>• castors dia: 125 mm;</li> <li>• 4 swivel castors (2 with brake).</li> </ul>		<p>Stainless steel interlocking kit available to interlock two stacked containers.</p>
	<p>5 seats to house grids located at 62/152/242/332/422 mm from the base of the container. Grids available on request.</p>		<p>Stainless steel grid for load allocation, available upon request.</p>
	<p>Provided with door openable up to 240°, with hinge integrated in the container</p>		<p>Closure in shockproof material.</p>
	<p>Easily removable door gasket.</p>		<p>Provided with stainless steel integrated carry handles.</p>
	<p>Monolithic structure, no sharp corners, junctions and welds.</p>		<p>Insulated with CFC and HCFC-free polyurethane foam.</p>

## CHARACTERISTICS



USB data logger available (on request) to record temperature data during transport.




°C

Container (insulated case) guaranteed for use: **-30° to +100°C.**

**K**




Heat transfer global coefficient:  
**K=0.35 W/m<sup>2</sup>K;**

## TECHNICAL SPECIFICATIONS

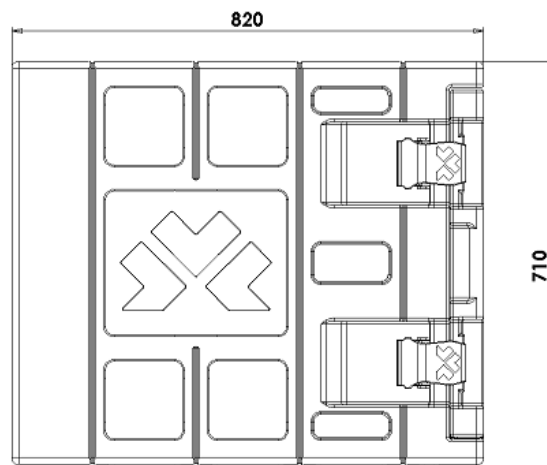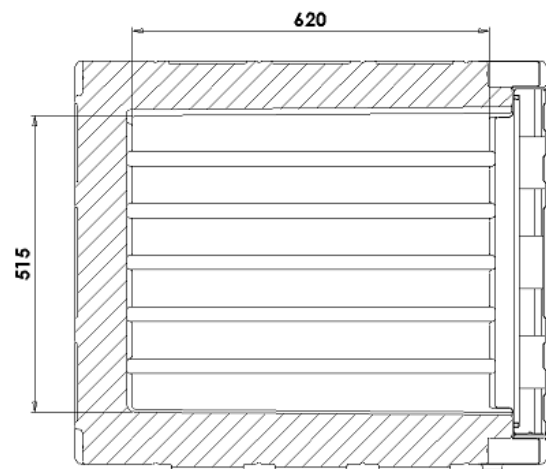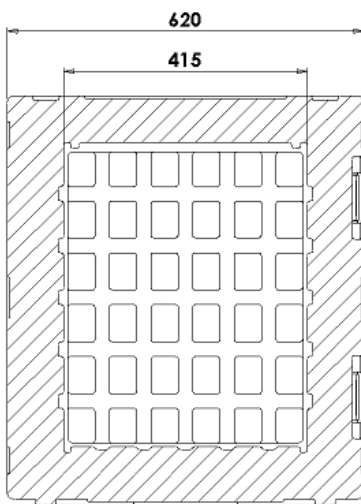

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
Cargo 140 <b>without runner for eutectic plate</b>	A1400001	grey/blue melange	620x820xh710	415x620xh515	140	31
Cargo 140 <b>with runner for eutectic plate</b>	A1400002	grey/blue melange	620x820xh710	415x620xh515	140	31.5
Grid <b>stainless steel</b>	AEA030	stainless	425x620xh12			2
Hot plate <b>GN 1/1</b>	PEGS0003	red	530x325xh30			3
Chilled plate <b>GN 1/1</b>	PEGS0001	pink	530x325xh30			4
Extra-chilled plate <b>GN 1/1</b>	PEGS9001	sand	530x325xh30			4
Frozen plate <b>GN 1/1</b>	PEGS0002	blue	530x325xh30			4
Extra-frozen plate <b>GN 1/1</b>	PEGS9008	green	530x325xh30			4
Data logger <b>USB</b>	AFG002		80x33xh14			
Locking kit <b>2 latches</b>	RRI137					1.2
Trolley <b>galvanised steel</b>	AIB004		630x830xh175			12

## SPARE PARTS

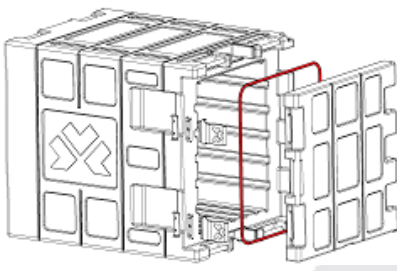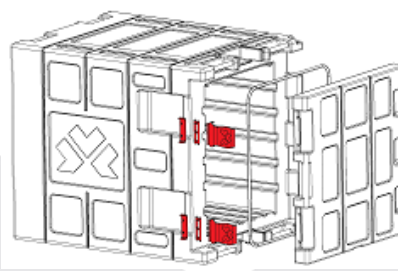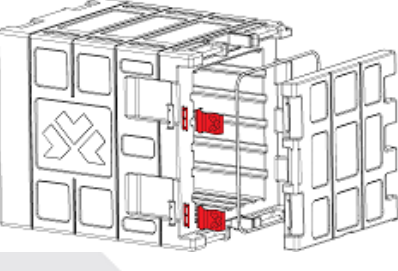		
<b>RRI181</b> Kit of gaskets 5 pieces per package	<b>RRI003</b> Locking kit (complete) 4 pieces per package	<b>RRI004</b> Blade only catches kit 4 pieces per package